

# MUNRO

## Munro Telesett

Top of the line.

All the advantages of the Munro Multiset with extra height.

Another world first for Munro. The **Telesett** retracts to a low height for transport and storage. Combining a digger and driver giving you the power to fence faster.

Covered by 6 months warranty and excellent service, the **Telesett** sets the standard others try to follow.

### Features

- 227 kg – 272 kg hammer
- Fastest hammer drop on the market
- Fastest flow dump valve on the market
- UHMWPE slide blocks for the lowest friction
- Hydraulic tilts
- OH&S compliant guarding
- Augers to 300mm, 12 inch
- 25-45 lpm oil flow required
- Adjustable drive shaft
- Hands free Autodigger
- Sideshift available

*Quality, Reliability, Service*

# MUNRO

a name you can trust

P.O. Box 80 Ballarat 3353


Ph: 03 5334 2770 Fax: 03 5334 2755

e-mail: [info@munroeng.com](mailto:info@munroeng.com)



### Telesett Dimension Chart

Dimension / parameter	Dimension Ref	Dimension	Telesett w/ Auto Digger
Base Width	A	mm	1100
		inch	43
Overall height, Min	B	mm	3090
		inch	122
Overall height, Dolly Up (Max)	B	mm	4620
		inch	182
Digging Depth	C	mm	1150
		inch	45
Height Under Dolly, Max	D	mm	3670
		inch	144
Height Under Dolly, Min	D	mm	1110
		inch	44
Dolly Stroke (Max Drop)		mm	1510
		inch	59
Extension Leg height addition		mm	n/a
		inch	n/a
Auger Capacity		mm	355
		inch	14
Side Tilt Capacity		degrees	12.5
For / Aft Tilt Capacity		degrees	12.5
Dolly Weight Min		kg	227
		lb	500
Max		kg	272
		lb	600
Remote Oil Flow Reqrd (LPM)		lpm	25-45
GPM		gpm	5.5-10
Remote Oil Press Reqrd Min (Bar)		Bar	135
		psi	2000
Weight		kg	650kg

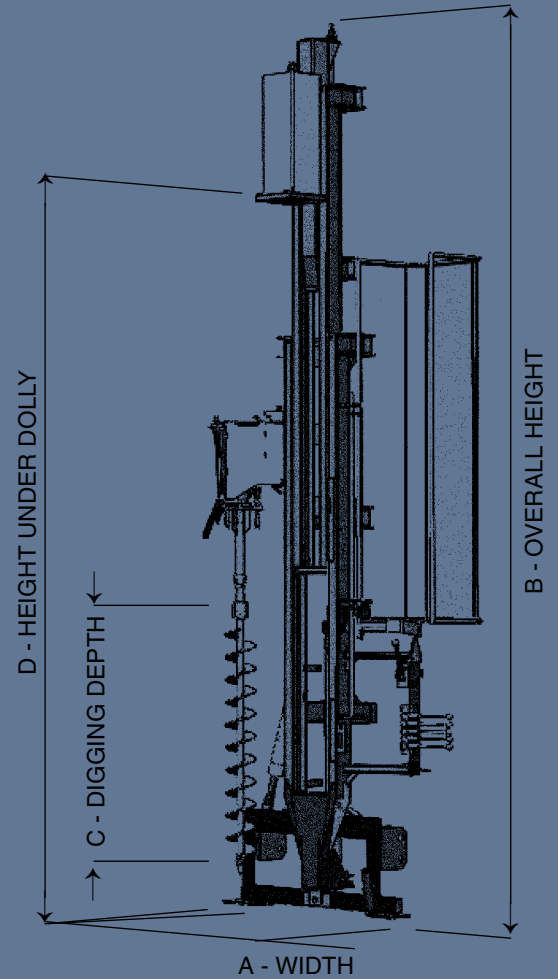

### Sideshift Dimension Chart

Dimension / parameter	Dimension Ref	Dimension	Sideshift
Overall Width		mm	1880
		inch	74
Dolly centre to tractor centre	E	mm	585
		inch	23
Extended	E	mm	1355
		inch	53

